



NV3-F-4G-PK.AVY.ORG

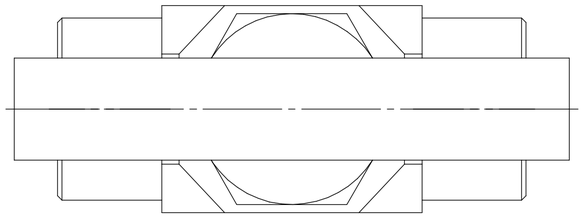

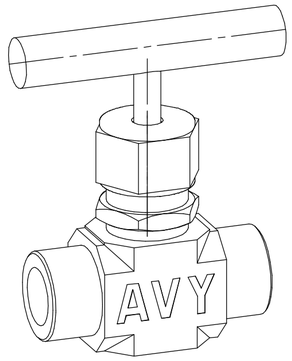

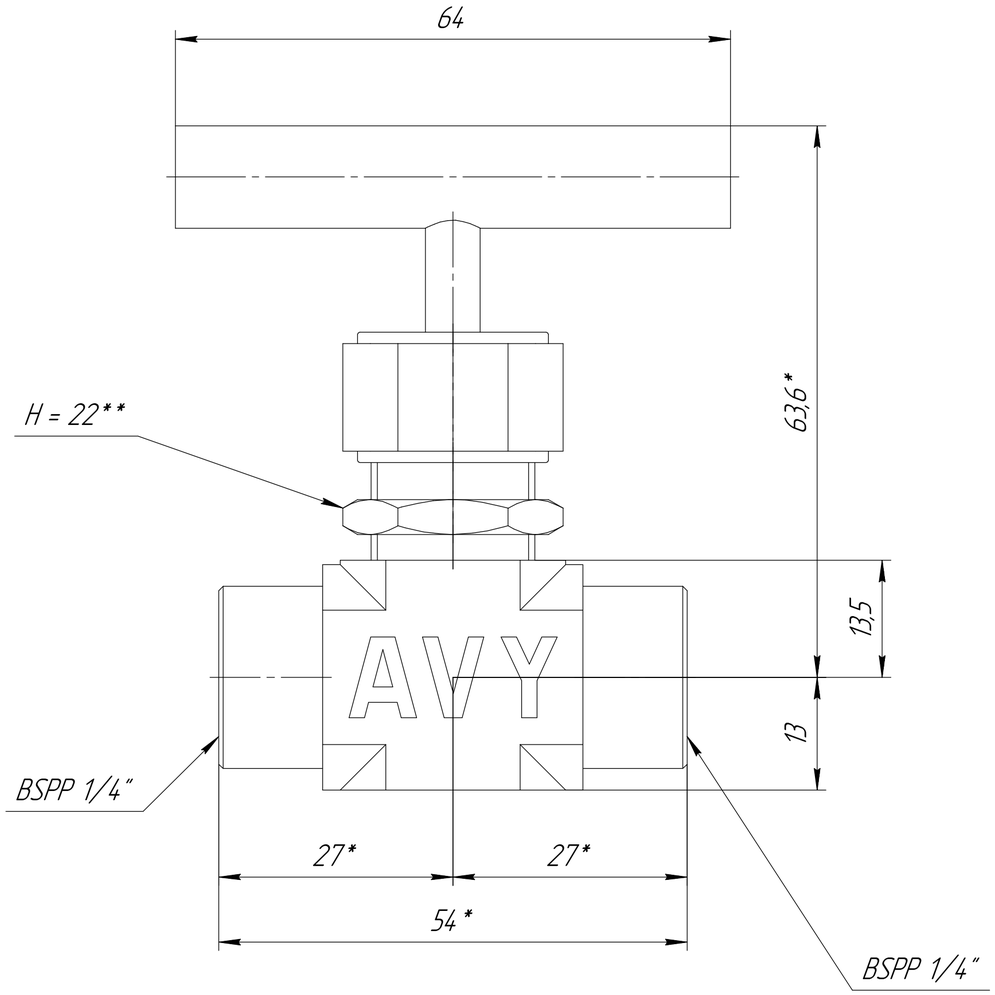

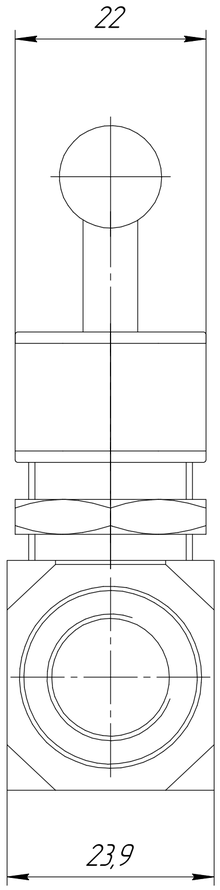

1. *This size may depend on the degree of tightening zaŭku
2 Pressure rating 413bar (T = 21 °C)
3 Temperature rating from -54 to 316°C
4 Needle V-shaped

					NV3-F-4G-PK.AVY.ORG	
Ch.	Sheet	№ doc.	Sign.	Date	Needle valve	Char. / Weight / Scale: 2:1
Develop.						Sheet 1 / Sheets
Checked						
Tech. contr.						
Reg. contr.						HY-LOK CORPORATION
Approv.						

Copied — Format A2

First mention | Reference № | Sign. and date | Inv. № copy | Exch. inv. № | Sign. and date | Inv. № orig.